



The  
Patent  
Office

PCT/GB 99 / 03521

09/830388

INVESTOR IN PEOPLE

GB 99/3521

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 22 NOV 1999

PAISO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 4-11-99

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)





The  
Patent  
Office



INVESTOR IN PEOPLE

GB9823427.1.

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

OVE ARUP PARTNERSHIP LIMITED,  
Incorporated in the United Kingdom,  
13 Fitzroy Street,  
LONDON,  
W1P 6BQ,  
United Kingdom

[ADP No. 07718406001]




9823427.1

1/77

Office

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office  
Cardiff Road  
Newport  
Gwent NP9 1RH

|  |  |  |  |
|--|--|--|--|
| 1. Your reference  | 270CT98 E400222-1 D00027<br>P01/7700 0.00 - 9823427.1  |  |  |
| 2. Patent application number<br>(The Patent Office will fill in this part)   |  |  |  |
| 3. Full name, address and postcode of the<br>or of each applicant ( <i>underline all surnames</i> )  | Ove Arup Partnership<br>Ritzroy Street<br>London W1P 6BQ<br>(1977 ACT) APPLICATION FILED 1/77/99 |  |  |
| Patents ADP number ( <i>if you know it</i> )   |  |  |  |
| If the applicant is a corporate body, give<br>country/state of incorporation   | 5731440000   |  |  |
| 4. Title of the invention  | Offshore Structure   |  |  |
| 5. Name of your agent ( <i>if you have one</i> )   | Frank B. Dehn & Co.  |  |  |
| "Address for service" in the United Kingdom<br>to which all correspondence should be sent<br>( <i>including the postcode</i> )   | 179 Queen Victoria Street<br>London<br>EC4V 4EL  |  |  |
| Patents ADP number ( <i>if you know it</i> )   | 166001   |  |  |
| 6. If you are declaring priority from one or more<br>earlier patent applications, give the country<br>and the date of filing of the or of each of these<br>earlier applications and ( <i>if you know it</i> ) the or<br>each application number  | Country  | Priority application number<br>( <i>if you know it</i> ) | Date of filing<br>(day / month / year) |
| 7. If this application is divided or otherwise<br>derived from an earlier UK application,<br>give the number and the filing date of<br>the earlier application   | Number of earlier application  | Date of filing<br>(day / month / year)                   |  |
| 8. Is a statement of inventorship and of right<br>to grant of a patent required in support of<br>this request? ( <i>Answer 'Yes' if:</i><br>a) any applicant named in part 3 is not an inventor, or<br>b) there is an inventor who is not named as an<br>applicant, or<br>c) any named applicant is a corporate body.<br>See note (d)) | yes  |  |  |

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

|                                  |              |
|----------------------------------|--------------|
| Continuation sheets of this form | 0            |
| Description                      | 14           |
| Claim(s)                         | 6            |
| Abstract                         | 1            |
| Drawing(s)                       | 11 <i>11</i> |

10. If you are also filing any of the following, state how many against each item.

|   |   |
|---|---|
| Priority documents  | 0 |
| Translations of priority documents  | 0 |
| Statement of inventorship and right to grant of a patent ( <i>Patents Form 7/77</i> ) | 0 |
| Request for preliminary examination and search ( <i>Patents Form 9/77</i> )           | 0 |
| Request for substantive examination ( <i>Patents Form 10/77</i> )                     | 0 |
| Any other documents ( <i>please specify</i> )   | 0 |

11. I/We request the grant of a patent on the basis of this application.

*RL*  
Signature

Date 26 October 1998

12. Name and daytime telephone number of person to contact in the United Kingdom

David Leckey  
0171 206 0600

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s) of the form. Any continuation sheet should be attached to this form.*
- If you have answered 'Yes', Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

67173.601

# Offshore Structure

5       The present invention relates to offshore structures such as for example, relocatable oil production platforms.

10       It is known in the art to provide offshore structures for use in oil production having a base, a number of legs and a platform which are pre-assembled before the entire structure is then transported to the production site. However, the transportation and installation of such structures is extremely costly and time consuming so that they are not easily relocatable.

15       Therefore it has been proposed in the art to provide offshore platforms in which a jacking system is used to lower the base to the seabed and to raise the platform to the required height above the base. Thus, ideally the deck or platform may be easily lowered and the base may be easily raised so that the entire structure can then be moved to a new site. Such platforms have a plurality of legs, a base and a platform and a rack and pinion type of jacking device has been used to raise and lower the base and platform as required. The rack and pinion provides a guide for the base and platform as they are being raised and lowered and also can be locked off so as to hold the platform at the required height while the rig is in use.

20       However, the jacking equipment required for such decks is expensive to produce and, in addition, as it remains permanently attached to the deck, it requires regular maintenance which is also extremely costly. Thus, if it were possible to remove the jacking system from the structure after installation, substantial savings could be made.

35       The present invention therefore seeks to provide an improved offshore structure in which a jacking system is not used to hold up the deck.

Therefore, from a first aspect, the present invention provides an offshore structure comprising a base, a deck and a plurality of lattice legs extending between the base and the deck, wherein the legs are  
5 arranged outboard of deck and a connection is provided between an inwardly facing face of each said leg and the deck.

By providing lattice legs located outboard of the platform, the deck may be raised to the required height  
10 relatively easily. Also, the formation of the connection between the legs and the deck allows the jacking system easily to be removed after installation. Thus, a standard jacking system can be hired for the duration of the installation of the structure, avoiding  
15 the manufacturing and maintenance costs involved with the permanent jacking systems of the prior art.

The lattice legs could take any known form, for example being made up of angle sections. However, preferably each lattice leg comprises a vertically  
20 extending chord at each corner thereof. Still more preferably, each chord is circular in cross-section.

Further, the lattice leg may be of any shape which satisfies the design requirements for a particular structure. However, preferably the lattice leg is  
25 triangular.

The connection between each leg and the deck could be formed in any suitable manner. Preferably, the connection between each leg and the deck comprises a shear plate attached substantially vertically between  
30 the platform and a leg chord.

In certain design situations, the chord of the leg could be of sufficient strength for the required loading. However, preferably the connection further comprises a stiffening plate extending through a  
35 diameter of the tubular member, wherein a first end of the shear plate is welded to the stiffening plate and the shear plate and the stiffening plate are



substantially aligned.

This provides a relatively simple means of connecting the shear plate to the tubular member and also provides extra strength in the structure.

5        In the event that the base of the structure was lying level on the seabed, the deck could be raised to the same height on each of the legs of the structure. However, in order to provide tolerances in the level of the deck relative to the legs, thus allowing for  
10       different seabed conditions, the stiffening plate preferably extends over a greater length of the chord than the length of shear plate.

      Thus, the shear plate need not be accurately aligned in the vertical direction before being welded to  
15       the stiffening plate.

      Preferably, tolerance in the distance between the inboard end of the shear plate and the deck edge is also accommodated. Thus, preferably the inboard end of the shear plate is welded between two plates extending  
20       outwardly from the deck edge.

      Preferably, the shear plate as described above carries only the shear forces between the platform and the legs. Therefore, the connection preferably further comprises at least one further coupling plate attached  
25       horizontally between the deck and the leg chords. This plate may carry tensile and compressive forces and bending moment loading applied between the deck and the legs.

      The coupling plate could be attached to the tubular  
30       chord and the deck in any suitable manner. Preferably however, the coupling plate has a cut-out in its end facing the leg chord, such that a part of the periphery of the leg chord is received within the cut-out. More preferably still, the cut-out is elliptical in shape.  
35       Therefore, a degree of tolerance in angular misalignment of the platform relative to the tubular leg is provided.

      Although the coupling plate may be attached to the

deck in any suitable manner, it is desirable that the plate be relatively simple to connect to the deck on-site. Preferably therefore, a horizontal web is attached to the deck and the coupling plate is butt  
5 welded thereto.

The coupling plate could be designed so as to be of sufficient strength itself to carry the necessary loading. However, preferably plate stiffeners extending from the inboard end to the outboard end and most  
10 preferably across the deck web are provided in the coupling plate. Still more preferably, a coupling plate is provided both at the top and the bottom of the shear plate.

Although it may be possible to attach the plates together in various ways, each coupling plate is  
15 preferably welded to the shear plate at the join between the plates.

Although a single connection could be provided between each of the legs and the deck, in a preferred  
20 embodiment of the invention, the connection is formed between the deck and two leg chords located at either end of the inwardly facing face of the lattice legs. Such an arrangement allows a stable connection to be formed between each leg and the deck.

In addition to the structure described above, a method of installing an offshore platform having some of the above described features is believed to be novel and  
25 inventive in its own right. Therefore, from a second aspect, the present invention provides a method of installing an offshore structure comprising a base, a  
30 deck and a plurality of lattice legs located outboard of the deck, the method comprising the steps of: jacking the deck to the required height; forming a permanent connection between the deck and the legs; and removing  
35 the jacking system from the structure.

As the lattice legs of the structure are located outboard of the deck, the deck may be jacked up the leg

relatively easily without a high risk of it becoming obstructed. In addition, the removal of the jacking system allows the installation of the structure to be carried out at a significantly reduced cost.

5           Although as stated above, the deck would be unlikely to become obstructed when being jacked up the legs, guides are preferably provided on the deck so as to guide the deck as it is jacked up the leg. Thus, in severe wave and wind conditions as are often found on  
10 site, the deck is hindered from moving excessively relative to the legs.

          There will be many possible ways of assembling the base, deck, legs and guides relative to one another prior to installation of the platform. However,  
15 preferably, the method of installing the offshore structure further comprises the steps of: attaching four legs to the base; attaching two guides to the deck; floating the deck over the base so that it passes between the legs until the guides engage two of said  
20 legs; and attaching two guides to the deck.

Thus two guides are installed after the deck has been floated into position so that they do not interfere with the positioning of the deck.

          Preferably, the guides comprise beams attached to  
25 and projecting from the deck and being shaped for engaging a chord of a said leg.

          Preferably, the deck is located relative to the legs prior to formation of the permanent connection. This allows some elements of the permanent connection to  
30 be prefabricated as their approximate dimensions will be known. In addition, as the deck cannot move relative to the legs once it has been located, the permanent connection is easier to make.

          Preferably, the deck is located by pulling the leg  
35 towards the deck so as to hold a leg chord against the guide. Still more preferably, a hydraulic tugger is provided between an outer edge of the leg and the deck

so as to pull the leg towards the deck.

In the method described above, the legs might skew slightly when the hydraulic tugger is tightened. This is because, the leg chord adjacent the guide would be held in position so that the other leg chord adjacent the deck would continue to be pulled towards the deck, effectively pivoting the leg about the guide. Therefore, hydraulic screw jacks are preferably provided at the base of the platform so as to push the inboard leg chords away from the lower deck edge, thus locating the leg squarely adjacent the deck edge.

Each of the legs could be located relative to the deck one by one and the permanent connection formed after each leg was located. However, preferably, the deck is pulled towards each of the legs simultaneously. This allows the location of the deck relative to the legs to be adjusted so as to provide a relatively even gap between each of the legs and the deck.

The method of locating a deck of an offshore structure relative to a plurality of outboard lattice legs is further considered to be novel and inventive in its own right. Therefore, according to a third aspect, the present invention provides a method of locating a deck of an offshore structure relative to a plurality of outboard lattice legs, said legs comprising a plurality of chords arranged at respective corners thereof, said method comprising the steps of pulling an outer leg chord towards said deck and pushing the leg chords located adjacent the deck away therefrom.

Preferably, the outer leg chord is pulled towards the deck by means of a hydraulic tugger.

Still more preferably, the leg chords located adjacent the deck are pushed away therefrom by means of hydraulic screw jacks extending from the deck edge.

When installing the offshore structure, the permanent connection could be made by any suitable means. However, preferably, the permanent connection is

formed by welding a substantially vertically extending shear plate between a chord of the lattice leg and the deck edge. Still more preferably, a stiffening plate is provided through a diameter of the leg chord, and a  
5 first side edge of said shear plate is welded to said stiffening plate, and said shear plate and said stiffening plate are substantially aligned.

In order to allow for tolerance in the vertical level of the deck relative to the leg, the stiffening  
10 plate preferably extends over a greater length of the leg chord than the length of the shear plate.

In order to provide tolerance in the horizontal dimensions of the gap between the deck edge and the inboard edge of the stiffening plate, two plates are  
15 preferably welded to the deck edge on respective sides of the shear plate and extending outwardly from the deck edge, and the inboard end of the said shear plate is preferably welded between the two plates.

Preferably, the shear plate carries shear forces  
20 only such that the web plate does not have to line up precisely with the bulkhead of the deck. Therefore, the connection further preferably comprises a further coupling plate attached horizontally between the deck and the leg chord, the second plate having a cut-out in  
25 an edge facing the leg chord, such that a part of the periphery of the leg chord is received within the cut-out. Still more preferably, the cut-out is elliptical in shape.

Although sufficient strength could be provided by a  
30 single coupling plate located either above or below the shear plate, preferably, a coupling plate is provided at the top and the bottom of the shear plate. Still more preferably, the shear plate and the coupling plate are welded together.

35 A preferred embodiment of the invention will now be described by way of example only and with reference to the accompanying drawings in which:

Figure 1 is a side elevation of an offshore structure;

Figure 2 is a side elevation of the structure of Figure 1, showing the deck and the base in their final positions relative to the legs;

Figures 3.1 to 3.12 are a series of schematic drawings showing the construction and installation sequence of the offshore structure;

Figure 4 is a side elevation of a leg of the offshore structure, showing the arrangement of a jacking system relative to the leg;

Figure 5 is a top plan view of the offshore structure, showing the arrangement of installation guides relative to the legs of the structure;

Figure 6 is a detail as shown at A on Figure 5;

Figure 7 is a plan view of a leg of the structure showing how the leg is located relative to the deck;

Figure 8 is a section through AA of Figure 7;

Figure 9 is a perspective view showing the connection made between a chord of a leg of the structure and the platform;

Figure 10 is a top plan view of the connection between a leg of the structure and the platform;

Figure 11 is a section along line 1-1 as shown in Figure 10;

Figure 12 is a detail at point A as shown in Figure 11;

Figure 13 is a detail at point B as shown in Figure 10; and

Figure 14 is a section along line 2-2 of Figure 12.

As shown in Figures 1 and 2, an offshore production platform 2 is provided having a concrete gravity base 4 of conventional construction, four triangular section lattice legs 6, and a deck 8. When installed, the gravity base 4 lies on the seabed and a permanent connection is provided between the deck 8 and the legs 6 which are arranged outboard of the deck 8, which carries

conventional topsides equipment.

As is further shown in Figure 2, lifting beams 10 are provided at the top of each of the lattice legs 6. During installation a jacking system, which will be  
5 discussed later will be attached between the lifting beams 10, the deck 8 and the base 4 so that the base and deck may be raised and lowered relative to one another.

The basic steps involved in the construction and installation of the various components of the offshore  
10 structure will now be described with reference to Figures 3.1 to 3.12.

As shown in Figure 3.1, the deck 8 of the structure is constructed at an onshore site. The deck 8 is of a standard construction and is designed to float, which  
15 avoids the need to use separate barges when transporting the structure to the installation site as will be shown below.

The deck 8 is then launched onto a semi-submersible barge 12 which is submerged so that the deck 8 floats  
20 off onto the water (Figures 3.2 and 3.3). The deck 8 is then towed to a fitting out quay where the topsides are installed on the deck (see Figure 3.4).

Figures 3.5 to 3.8 show the construction and installation of the gravity base 4 and legs 6 of the  
25 structure. As shown in Figure 3.5, the legs 6 and the base 4 are constructed on shore, one of the legs 6 then being attached to each of the four corners of the base 4 in a conventional manner. A jacking system (not shown) is then assembled between the base 4 and the legs 6. In  
30 particular a plurality of strand jacks are connected between the lifting beams 10 at the tops of the legs 4 and the gravity base.

Next, the base 4 is launched onto a semi-submersible barge 12, the barge is submerged and the  
35 base and legs are floated off the barge. The base 4 is then sunk in the shallow water close to the shore in preparation for mating with the deck 8.

As shown in Figure 3.9, to mate the base 4 and deck 8, the deck 8 is towed between the legs 6 so that it is positioned over the base 4. As shown in Figures 5 and 6, four guide members 14 are provided on the deck 8 so as to aid in installation of the structure. Each guide member 14 is made up of a steel beam having an L-shaped recess 16 in one end thereof. The recess 16 has a hardwood facing 17 to minimise contact damage. Two of the guide members 14 at one end of the deck 8 are attached to the upper surface of the deck 8, one on either side thereof, prior to engagement of the base 4 and deck 8, so that as the deck is towed between the legs 6, it will come to rest against two legs 6 of the structure when the respective guide members 14 abut these legs 6. Thus, the guide members are used loosely to locate the deck relative to the legs 6.

Once the deck 8 is in position over the base 4, the other two guide members 14 are fixed to the deck, with the other two legs received within the recesses 16 thereof. A clearance is left between them so as to allow for tolerances later on in the installation process. The deck 8 and base 4 are then firmly secured together by jacking the base 4 up against the deck 8. The assembly is then towed offshore to the installation site as shown in Figure 3.10.

On arrival at the installation site, the base 4 is lowered to the seabed 18 as shown in Figure 3.11 and the platform is then jacked up to the required elevation as shown in Figure 3.12. Further details of those operations will now be discussed.

The arrangement of the jacking system 21 and the guide members 14 is shown in greater detail in Figures 4 to 6. As shown in Figures 4 and 5, the jacking system 21 includes eight jacks located adjacent each of the four legs 6 of the structure. A set of four jacks 20 for lowering the base 4 relative to the deck 8 on to the seabed is provided adjacent the inner inboard corner 22



of each of the triangular lattice legs 6. Two jacks 24 for raising the deck 8 are provided between each set of base lowering jacks 22 and each leg 6, and a further two deck raising jacks 26 are provided on the other side of each of the legs 6 adjacent the deck 8. Each guide member 14 extends from the deck 8 for location, to engage the outer inboard corner 28 of each leg 6, adjacent the two further deck raising jacks 26.

Figure 4 shows the eight jacks 20,24,26 adjacent one of the legs 6 in vertical perspective view. The jacks 20,24,26 are attached to the top of the legs 6 via the lifting beam 10. They extend parallel to the leg 6 to the base 4 where they are held in a jack anchorage 30. The deck 8 located between the lifting beam 10 and base 4 is attached to each of the jacks 20,24,26 via anchor plates 23 attached to the deck 8 after the deck has been floated into position on the base 4. The deck 8 and base 4 may be raised and lowered relative to one another and to the legs 6.

As can be seen from Figures 5 and 6, as the deck is jacked up to the required height during installation, it will be located relative to the legs 6, but with some play, by the corner 28 of each leg abutting against the guide member 14. Typically a gap of approximately 1m is left between the deck edge 32 and each of the legs 6 and about 15 cm between the legs 6 and the guide end and the legs 6.

Once the deck has been raised to the required height by the jacking system, it is necessary to form a permanent connection between the deck 8 and the legs 6 so that the jacking system may be removed. In order to do this, the deck 8 is first more accurately located relative to the legs 6.

The means of locating the deck relative to the legs 6 are shown in Figures 7 and 8. As shown in Figure 7, each lattice leg 6 is triangular in shape and has a vertically extending chord 34 at each of its three

corners. Two of the three corners of each triangular leg are arranged adjacent the deck edge 32. Thus, the third corner of the leg (referred to as the outboard chord) is positioned further outboard with respect to the deck 8.

To locate the deck, a strop 36 is attached around the outboard chord 34. A hydraulic tugger 38 is then attached between the strop and a padeye 40 provided at the bottom 42 of the deck edge 32. In addition, a pair of inwardly included hydraulic screw jacks 44 are positioned between fixed deck brackets 41 extending from the bottom 42 of the deck edge 32 and each of the inboard tubular members 34. The hydraulic tugger 38 is then tensioned so as to pull the respective leg 6 towards the deck 6 and, more specifically, the relevant chord 34 of the leg 6 against the guide member 14.

Next, the screw jacks 44 are activated to seat between the deck brackets 41 and the tubular members 34 and the hydraulic tugger 38 is tensioned further so as to hold the connection in position. As the guide members 14 are positioned at the top surface of the deck 8 and the screw jacks at the bottom of the deck 8, the temporary connection formed to locate the deck relative to the legs 6, provides a relatively accurate means of location in both the horizontal and vertical planes.

After the deck has been located relative to the legs 6 as described above, a permanent connection is then formed between the deck and the legs 6. A schematic perspective view of the connection between an inboard chord 34 of a leg 6 and the deck edge 32 is shown in Figure 9. The connection is made up of a vertically extending steel shear plate 46 and upper 48 and lower 50 horizontally extending metal coupling plates. The connection is shown in greater detail in Figures 10 to 13. As shown in Figure 10, respective connections are made between each of the two inboard chords 34 of the leg and the deck edge 32.

One end of the shear plate 46 is butt welded to one end of a stiffening plate 52 which extends through the diameter of each of the inboard chords 34 to which a connection is to be made (see Figure 12). When making  
5 the connection, the shear plate 46 is firstly swung into position between a chord 34 and the deck edge 32. This plate 46 is then butt welded to the stiffening plate 52 along one of its outboard vertical edges. In order to allow for a degree of tolerance in vertical alignment  
10 between the legs and deck, the stiffening plate 52 extends over a greater length  $L_1$  of the chord 34 than the length  $L_2$  of the shear plate 46 to which it is welded. Indeed the stiffening plate extends upwardly as far as the lifting beam 10 in each leg 6.

15 The shear plate 46 is then attached to the platform edge as follows.

As shown in Figure 14, a first metal plate 54 is fillet welded to the deck edge 32 so that it extends out from the deck adjacent one side of the shear plate 46.  
20 A second metal plate 56 is then fillet welded to the deck edge 32 so that it extends adjacent the other side of the shear plate 46. The shear plate 46 is then fillet welded to both of the metal plates 54 and 56. This method of attachment means that the width of the  
25 shear plate 46 need not be exactly the same as the distance between the stiffening plate 52 and the deck edge, thereby providing a tolerance in the horizontal positioning of the deck 8 relative to the legs 6.

Once the shear plate 46 has been welded into  
30 position, the upper 48 and lower 50 coupling plates are then swung into position. The coupling plates 48,50 are formed with an elliptical cut-out 58 in their outboard edges, as shown in Figures 10 and 13, and each chord is received in a cut-out 58. As the cut-out 58 is  
35 elliptical rather than circular, in shape, some degree of angular tolerance is provided in the positioning of the coupling plate 48,50 relative to the chord 34. As

can be seen from Figure 13, web 60 extends outwardly from the upper surface 62 of the deck edge 32. Location brackets 63 are pre-welded to the deck 8 and the web 60 so as to assist in alignment of the upper coupling plate 48,50 with the web 60. The coupling plate is then cut to size so as to fit between the web 60 and the chord. One end of the coupling plate 48,50 is positioned against the end of the web 60 and butt welded to the web, while the other end of the coupling 48,50 is butt welded to the chord 34 around the circumference of the cut-out 58. The coupling plates 48,50 are also fillet welded to the shear plate 46. Thus, again, tolerance is allowed in the horizontal distance between the leg and platform. Plate stiffeners 64 are also welded across the coupling plates 48 and 50 and their respective webs 60.

The connection between the deck 8 and each leg chord 34 thus comprises a shear plate 46, and two coupling plates 48,50, and this provides a strong connection capable of withstanding both shear and bending loads.

Once a connection as described above has been made between the two chords 34 of each leg 6 and the deck 8, the jacking system may then be removed.

It will be appreciated by those skilled in the art that many modifications could be made to the embodiment of the invention described above without departing from the scope of the invention as claimed. Thus, the platform may have any number of legs and those legs could be of any shape, for example, they could be square. Furthermore, the invention may also be applicable to structures having legs which do not have a lattice structure.

Claims

1. An offshore structure comprising a base, a deck,  
and a plurality of lattice legs extending between the  
base and the deck, wherein the legs are arranged  
outboard of the deck and a connection is provided  
between an inwardly facing face of each said leg and the  
deck.
2. An offshore structure as claimed in claim 1,  
wherein each said lattice leg comprises a vertically  
extending chord at each corner thereof.
3. An offshore structure as claimed in claim 2,  
wherein each said leg chord is circular in cross  
section.
4. An offshore structure as claimed in any preceding  
claim, wherein each said lattice leg is triangular.
5. An offshore structure as claimed in any of claims 2  
to 4, wherein the connection between each said leg and  
the deck comprises a shear plate attached substantially  
vertically between the deck and a said leg chord.
6. An offshore structure as claimed in claim 5,  
wherein the connection further comprises a stiffening  
plate extending through a diameter of the leg chord,  
wherein a first side edge of said shear plate is welded  
to said stiffening plate and said shear plate and said  
stiffening plate are substantially aligned.
7. An offshore structure as claimed in claim 6,  
wherein the stiffening plate extends over a greater  
length of the leg chord than the shear plate.

8. An offshore structure as claimed in claim 6 or 7, wherein the inboard end of said shear plate is welded between two plates extending outwardly from the deck edge.

5

9. An offshore structure as claimed in any of claims 5 to 8, wherein the connection further comprises a further metal coupling plate attached horizontally between the deck and the leg chord.

10

10. An offshore structure as claimed in claim 9, wherein the coupling plate has a cut-out in an edge facing the leg chord, such that a part of the periphery of the leg chord is held within the cut-out.

15

11. An offshore structure as claimed in claim 10, wherein the cut-out is elliptical in shape.

20

12. An offshore structure as claimed in any of claims 9 to 11, wherein a horizontal web is attached to the deck and the coupling plate is butt welded thereto.

25

13. An offshore structure as claimed in any of claims 9 to 12, wherein plate stiffeners extending from the inboard end to the outboard end are provided in the coupling plate.

30

14. An offshore structure as claimed in any of claims 9 to 13, wherein a coupling plate is provided at the top and the bottom of the shear plate.

35

15. An offshore structure as claimed in claim 14, wherein each coupling plate is welded to the shear plate at the join between the plates.

16. An offshore structure as claimed in any of claims 2 to 15, wherein the connection is formed between the deck

and two said leg chords located at either end of the inwardly facing face of the lattice leg.

5 17. A method of installing an offshore structure comprising a base, a deck and a plurality of lattice legs located outboard of the deck, the method comprising the steps of: jacking the deck to the required height; forming a permanent connection between the deck and the legs; and removing the jacking system  
10 from the structure.

18. A method of installing an offshore structure as claimed in claim 17, wherein guides are provided on the deck so as to guide the deck as it is jacked up the  
15 legs.

19. A method of installing an offshore structure as claimed in claim 18, further comprising the steps of: attaching four legs to the base; attaching two guides to  
20 the deck; floating the deck over the base so that it passes between the legs until the guides abut against two said legs; and attaching another two guides to the deck.

20. A method of installing an offshore structure as claimed in claim 18 or 19, wherein the guides comprise beams attached to and projecting from the upper surface of the deck and being shaped for engaging a chord of a  
25 said leg.

21. A method of installing an offshore structure as claimed in any of claims 17 to 20, wherein the deck is located relative to the legs prior to formation of the permanent connection.  
30

22. A method of installing an offshore structure as claimed in claim 21, wherein the deck is located by  
35

pulling the leg towards the deck so as to hold the leg chord against the guide.

23. A method of installing an offshore structure as  
5 claimed in claim 22, wherein a hydraulic tugger is provided between an outer edge of the leg and the deck so as to pull the leg towards the deck.

24. A method of installing an offshore structure as  
10 claimed in any of claims 21 to 23, wherein hydraulic screw jacks are provided at the base of the deck so as to push the inboard leg chords away from the lower deck edge.

25. A method of installing an offshore structure as  
15 claimed in any of claims 22 to 24, wherein the deck is pulled towards each of the legs.

26. A method of locating a deck of an offshore  
20 structure relative to a plurality of outboard lattice legs, said legs comprising a plurality of chords arranged at respective corners thereof, said method comprising the steps of pulling an outer leg chord towards said deck and pushing the leg chords located  
25 adjacent the deck away therefrom.

27. A method of locating a deck of an offshore  
structure relative to a plurality of outboard lattice legs as claimed in claim 26, wherein the outer leg chord  
30 is pulled towards the deck by means of a hydraulic tugger.

28. A method of locating a deck of an offshore  
structure relative to a plurality of outboard lattice  
35 legs as claimed in claim 26 or 27, wherein the leg chords located adjacent the deck are pushed away therefrom by means of hydraulic screw jacks extending



from the deck edge.

29. A method of installing an offshore structure as  
5 claimed in any of claims 17 to 25, wherein the permanent  
connection is formed by welding a substantially  
vertically extending shear plate between a chord of the  
lattice leg and the deck edge.

30. A method of installing an offshore structure as  
10 claimed in claim 29, wherein a stiffening plate is  
provided through a diameter of the leg, and a first side  
edge of said shear plate is welded to said stiffening  
plate, and said shear plate and said stiffening plate  
are substantially aligned.

15 31. A method of installing an offshore structure as  
claimed in claim 30, wherein the stiffening plate  
extends over a greater length of the leg chord than the  
shear plate.

20 32. A method of installing an offshore structure as  
claimed in claim 30 or 31, wherein two plates are welded  
to the deck edge on respective sides of the shear plate  
and extending outwardly from the deck edge, and the  
25 inboard end of said shear plate is welded between the  
two plates.

33. A method of installing an offshore structure as  
30 claimed in any of claims 29 to 32, wherein the  
connection further comprises a further metal coupling  
plate attached horizontally between the deck and the leg  
chord, the second metal plate having a cut-out in an  
edge facing the leg chord, such that a part of the  
periphery of the leg chord is held within the cut-out.

35 34. A method of installing an offshore structure as  
claimed in claim 33, wherein the cut-out is elliptical

in shape.

35. A method of installing an offshore structure as  
claimed in claim 33 or 34, wherein a coupling plate is  
5 provided at the top and the bottom of the shear plate.

36. A method of installing an offshore structure as  
claimed in any of claims 33 to 35, wherein the shear  
plate and the coupling plate are welded together.  
10

37. An offshore structure comprising a base, a deck,  
and a plurality of legs extending between the base and  
the deck, wherein the legs are arranged outboard of the  
deck and a connection is provided between an inwardly  
15 facing face of each said leg and the deck.

38. A method of installing an offshore structure  
comprising a base, a deck and a plurality of legs  
located outboard of the deck, the method comprising the  
20 steps of jacking the deck to the required height;  
forming a permanent connection between the deck and the  
legs; and removing the jacking system from the  
structure.

39. An offshore structure substantially as herein  
described and with reference to the accompanying  
drawings.  
25

40. A method of installing an offshore structure  
substantially as herein described and with reference to  
the accompanying drawings.  
30

41. A method of locating a deck of an offshore  
structure relative to a plurality of outboard lattice  
35 legs substantially as herein described and with  
reference to the accompanying drawings.

ABSTRACT

Offshore Structure

5

The present invention provides an offshore structure 2 comprising a base 4, a deck 8, and a plurality of lattice legs 6 extending between the base and the deck, wherein the legs are arranged outboard of the deck and a connection is provided between an  
10 inwardly facing face of each said leg and the deck.

**THIS PAGE BLANK (USP)**


FIG. 1

SHIP SURFACE (LVL)  
15.5 ft. (4.73m) LVL

WATER SURFACE (LVL)  
11.5 ft. (3.51m) LVL


ELEVATION

GRAPHIC SCALE

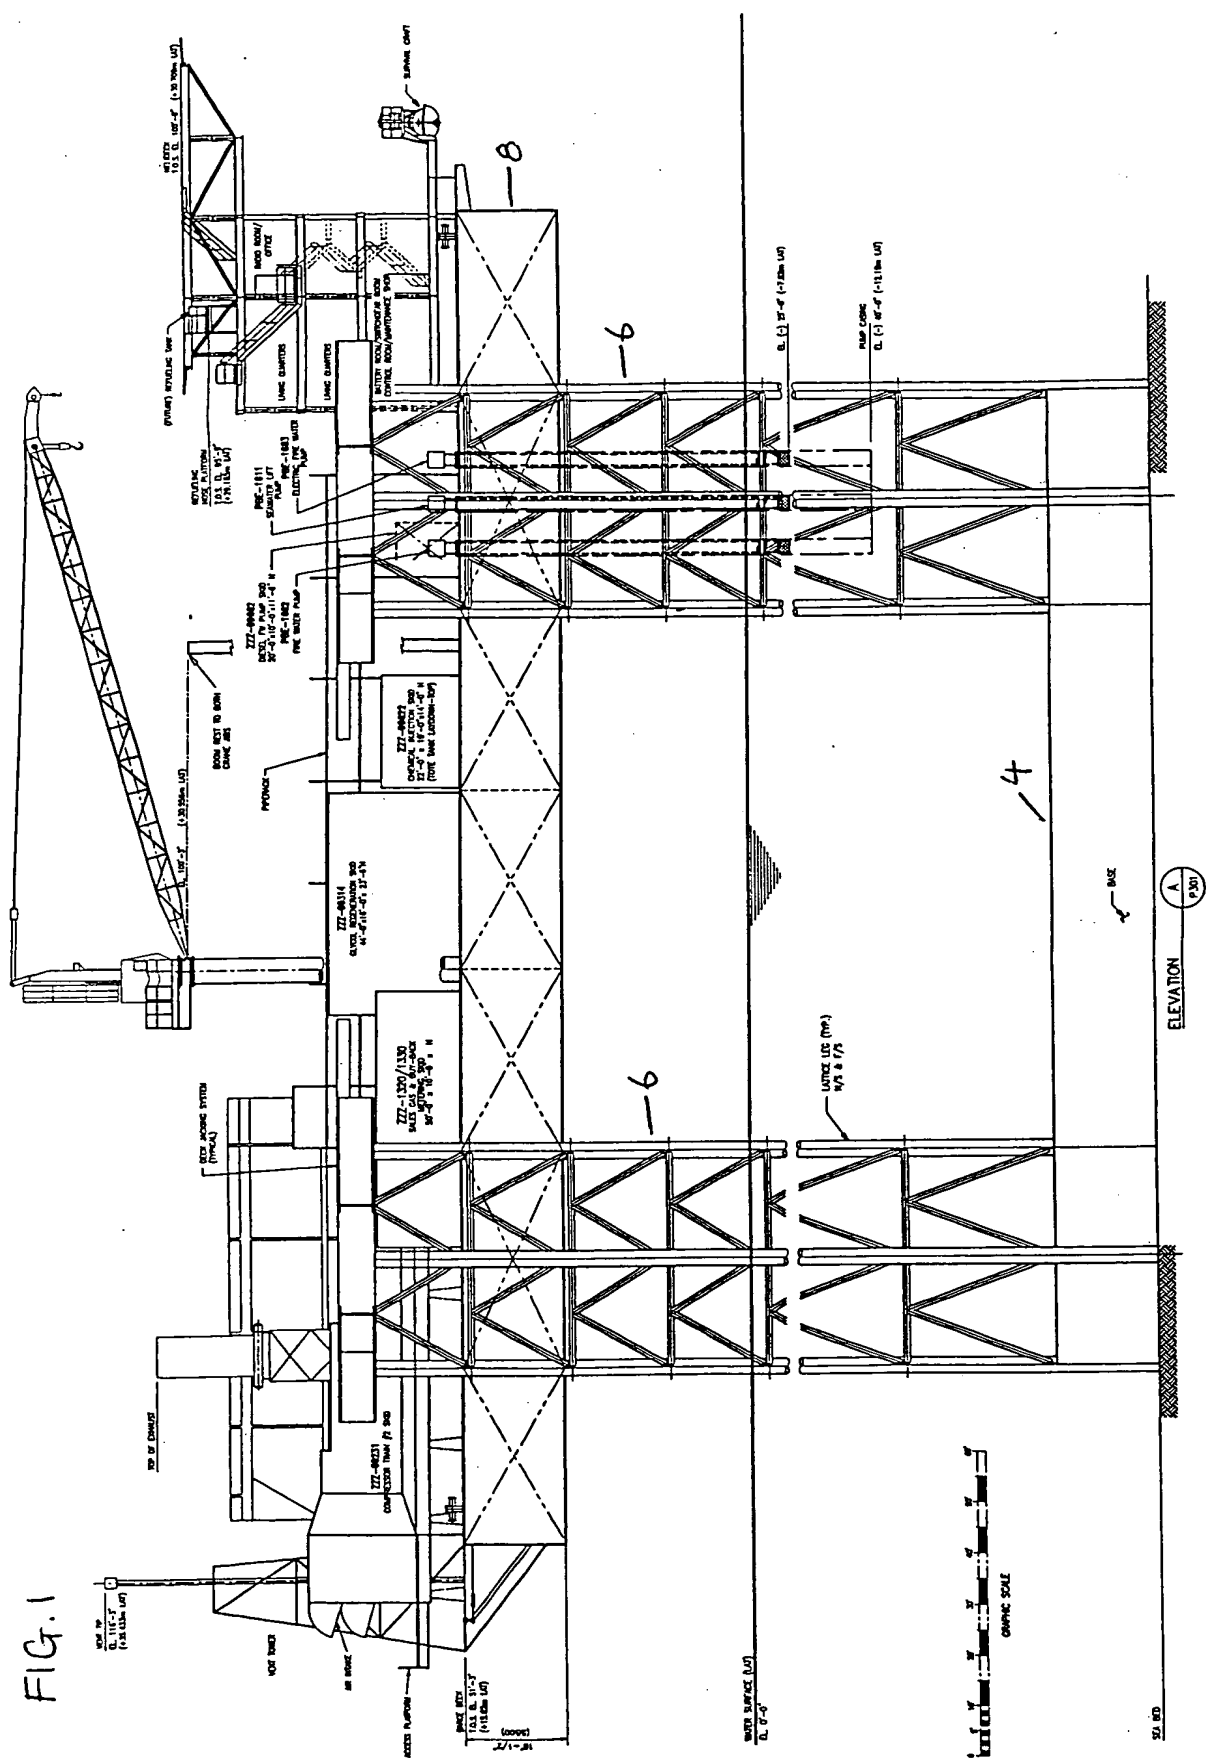

**THIS PAGE BLANK (USPTO)**

FIG. 2

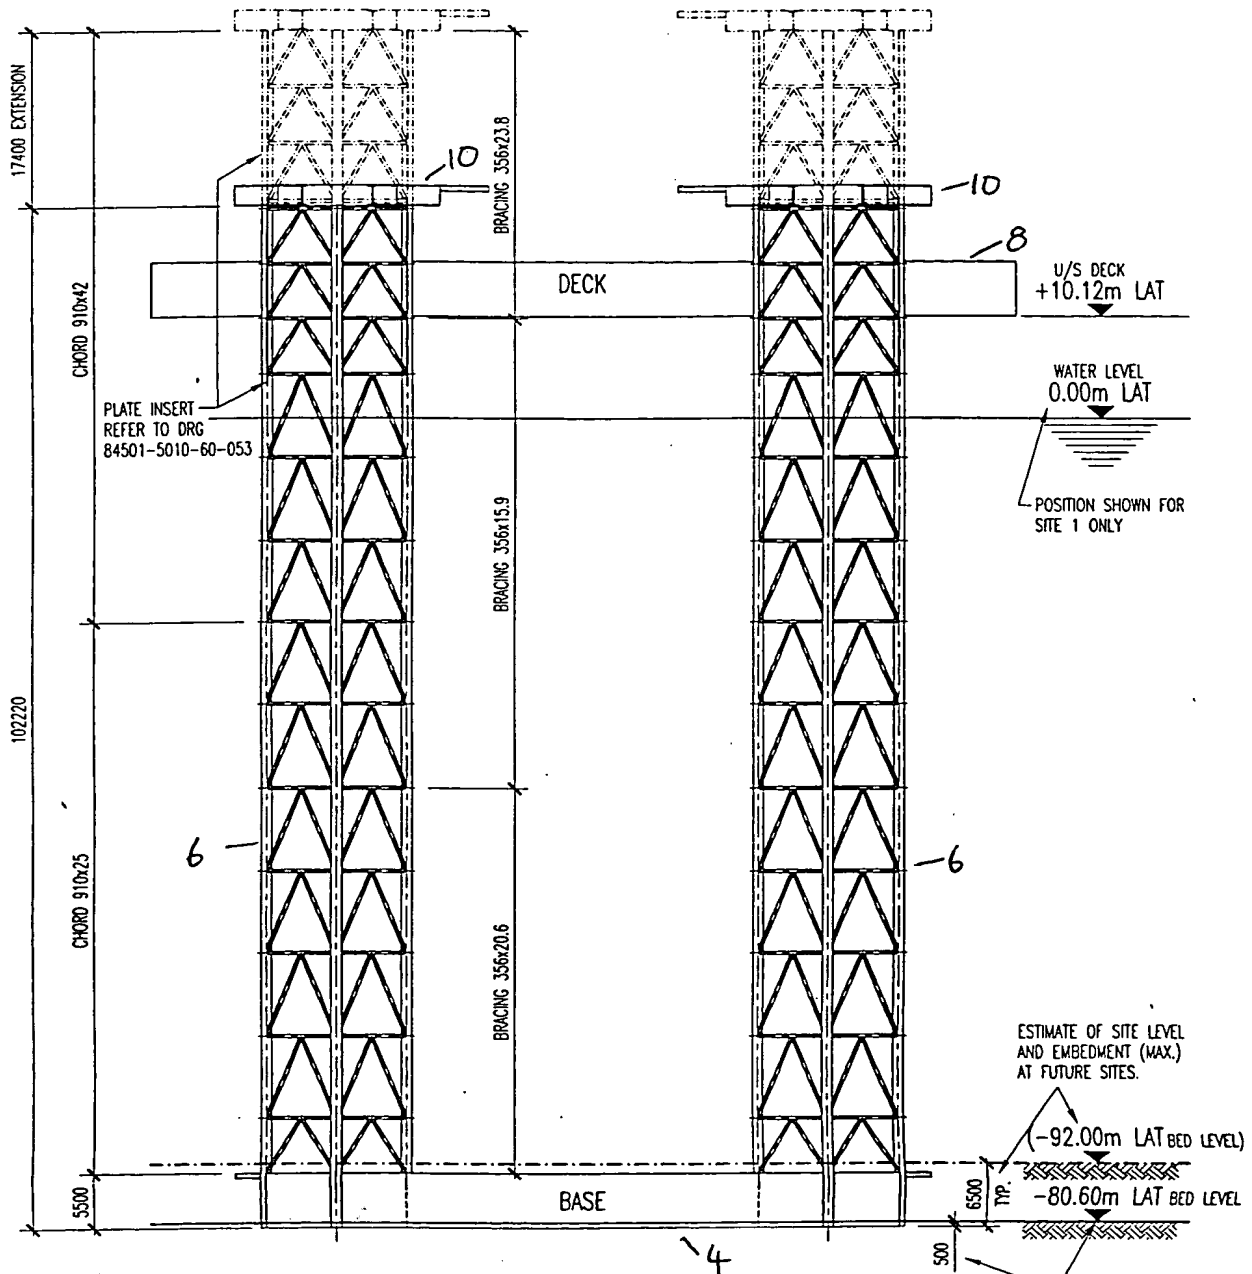


NOTE:

1. ALL TUBULAR STEEL TO PLATFORM LEGS AND LEG BRACES TO BE HIGH STRENGTH IN ACCORDANCE WITH REQUIREMENTS OF THE SPECIFICATION. 'Z' QUALITY STEEL IS REQUIRED IN THE REGION OF THE TUBULAR BRACE JOINTS.
2. ALL OTHER STEEL TO BE HIGH STRENGTH IN ACCORDANCE WITH THE SPECIFICATION.
3. ALL TUBULAR JOINTS TO BE FULL PENETRATION BUTT WELDS UNLESS OTHERWISE NOTED.
4. ALL WELDS TO BE 6mm CFV MINIMUM UNLESS OTHERWISE NOTED.


**THIS PAGE BLANK (USPIC)**




Deck construction at onshore site




2. Deck launched onto semi-submersible barge

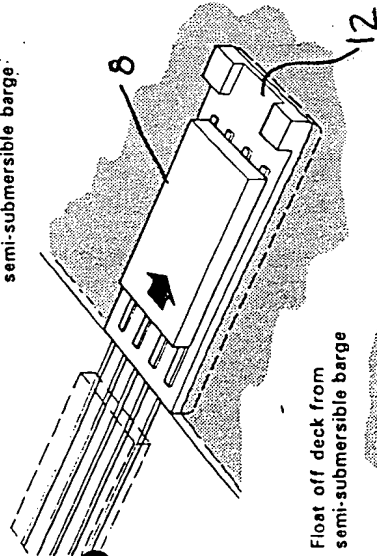


Float off deck from semi-submersible barge

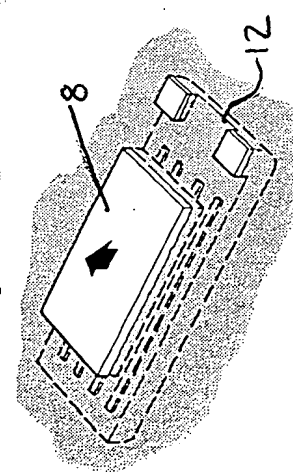


4. Deck towed to fitting out quay for topside installation

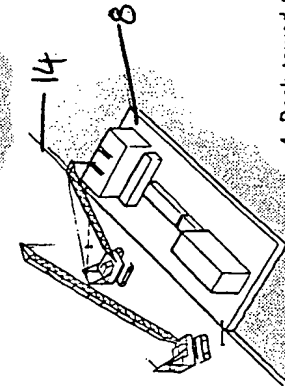


5. Construct base and legs at onshore site. Install jacking systems to base and legs

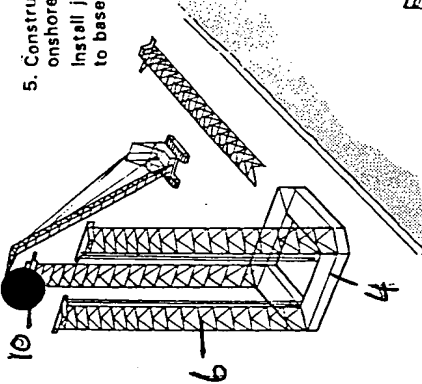


6. Launch base onto semi-submersible barge

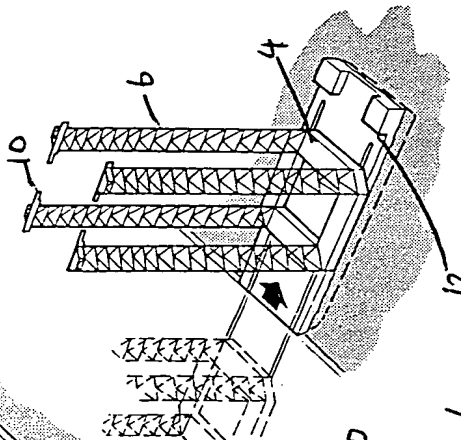


7. Float off base from semi-submersible barge

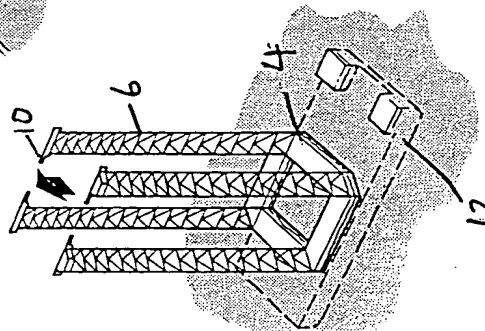


8. Inclined installation of base in shallow water prior to deck mating




10. Secure base to deck for offshore tow

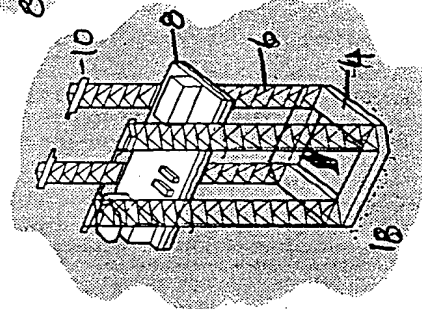


11. Lower base to seabed

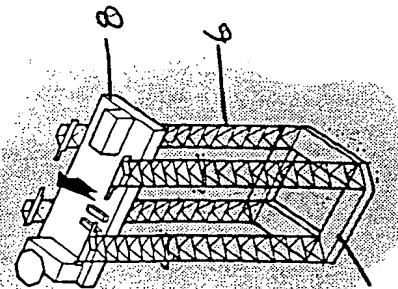

12. Jack deck to required elevation for permanent connection

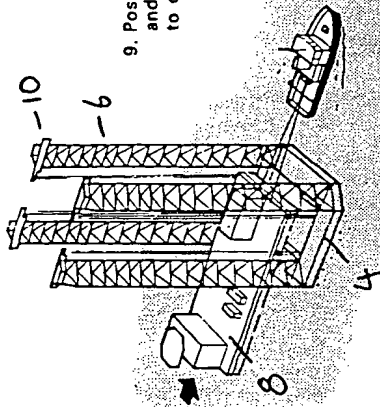


9. Position deck over base and attach lifting jacks to deck


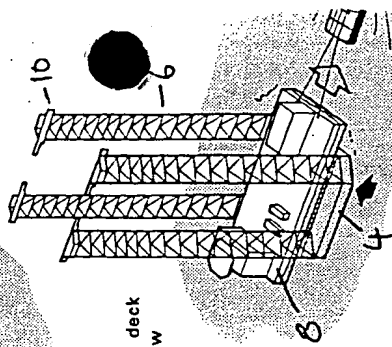


**THIS PAGE BLANK (USF..**

FIG. 4

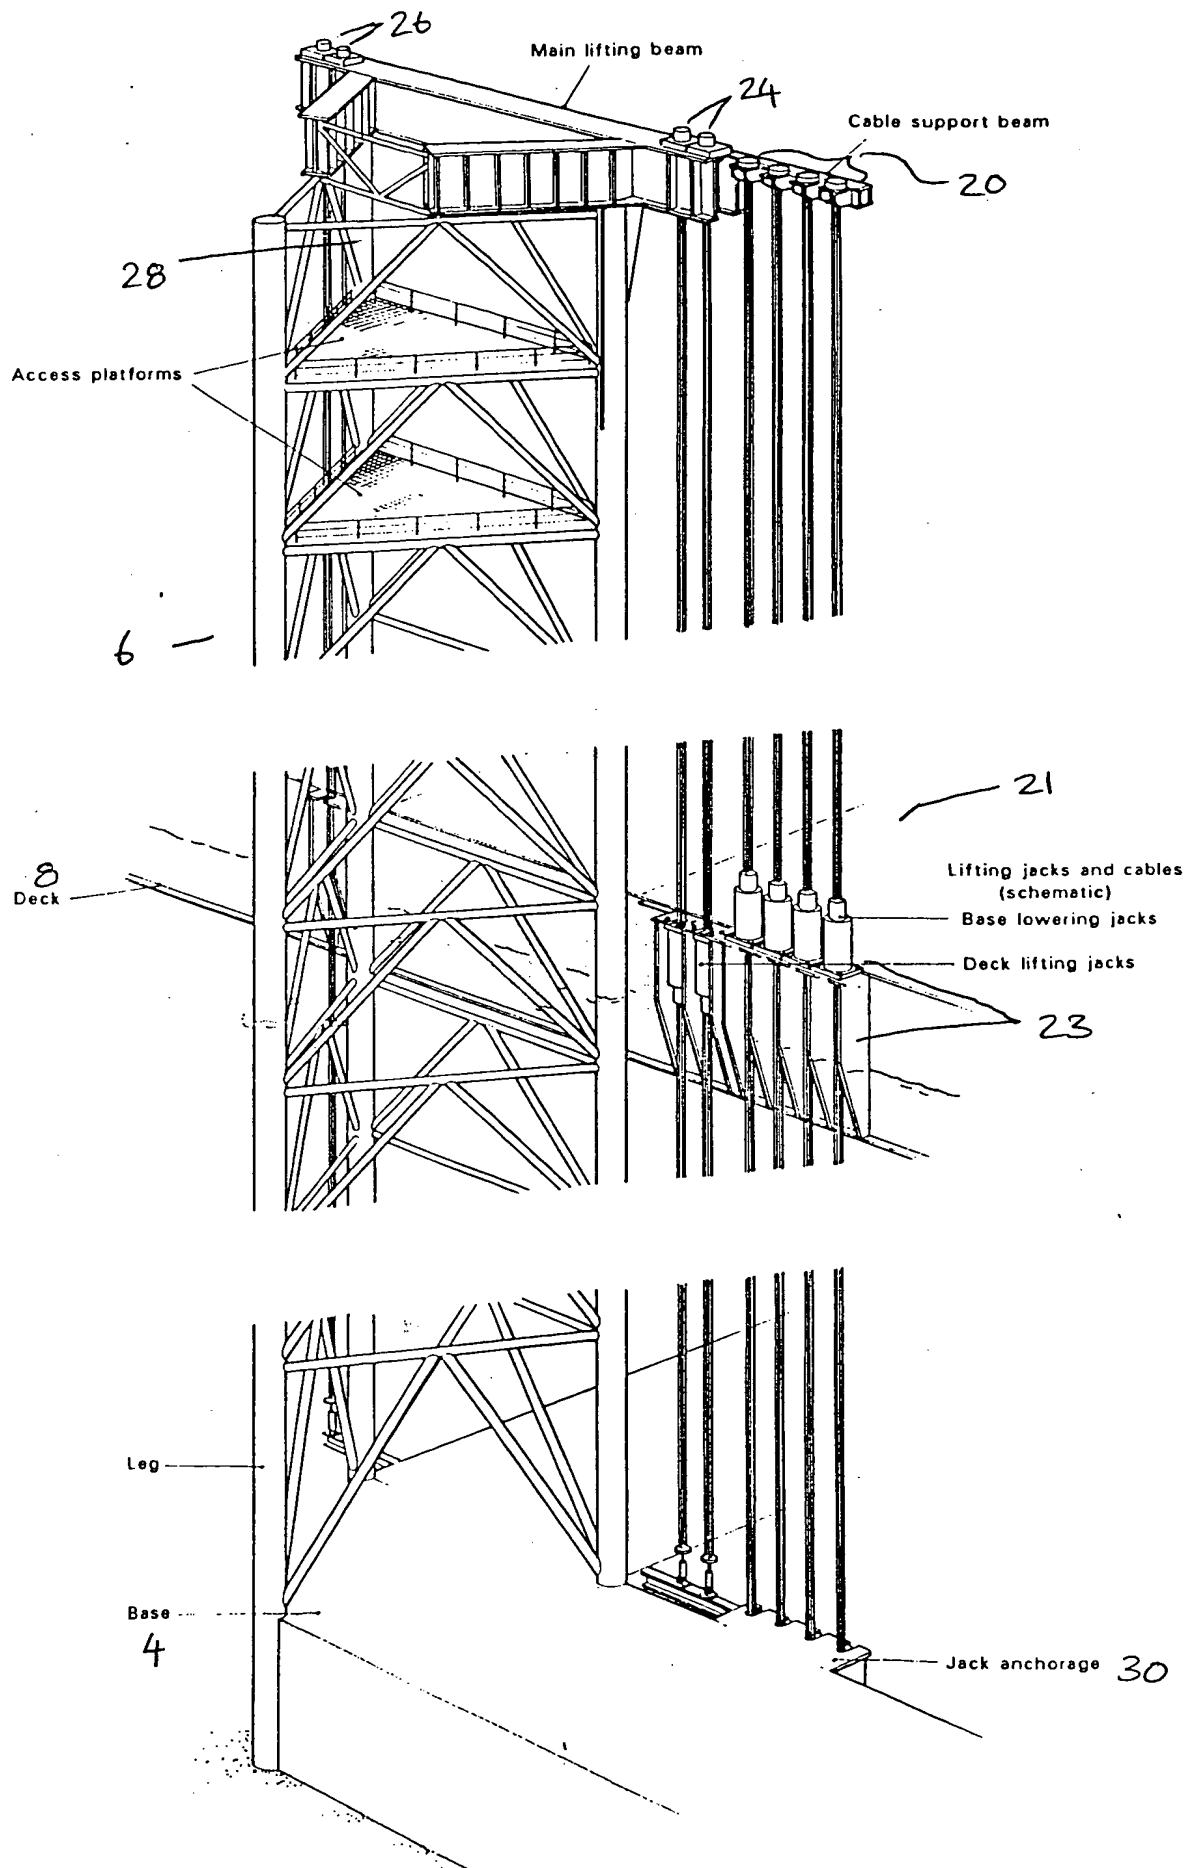


**THIS PAGE BLANK (USP)**

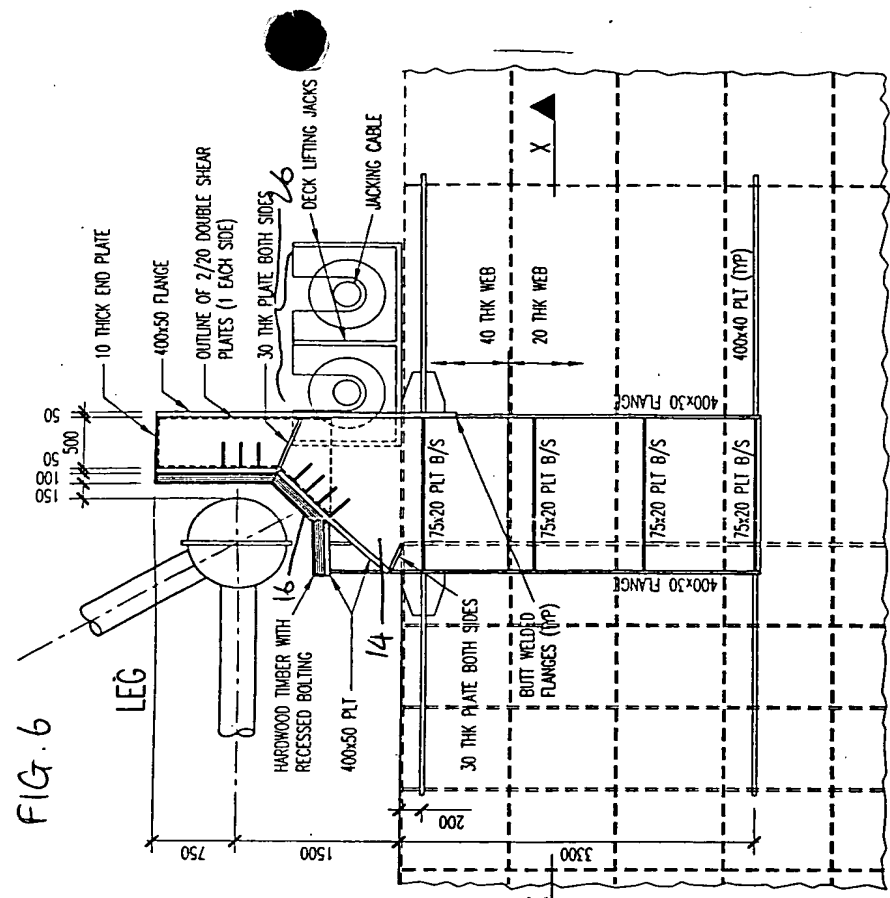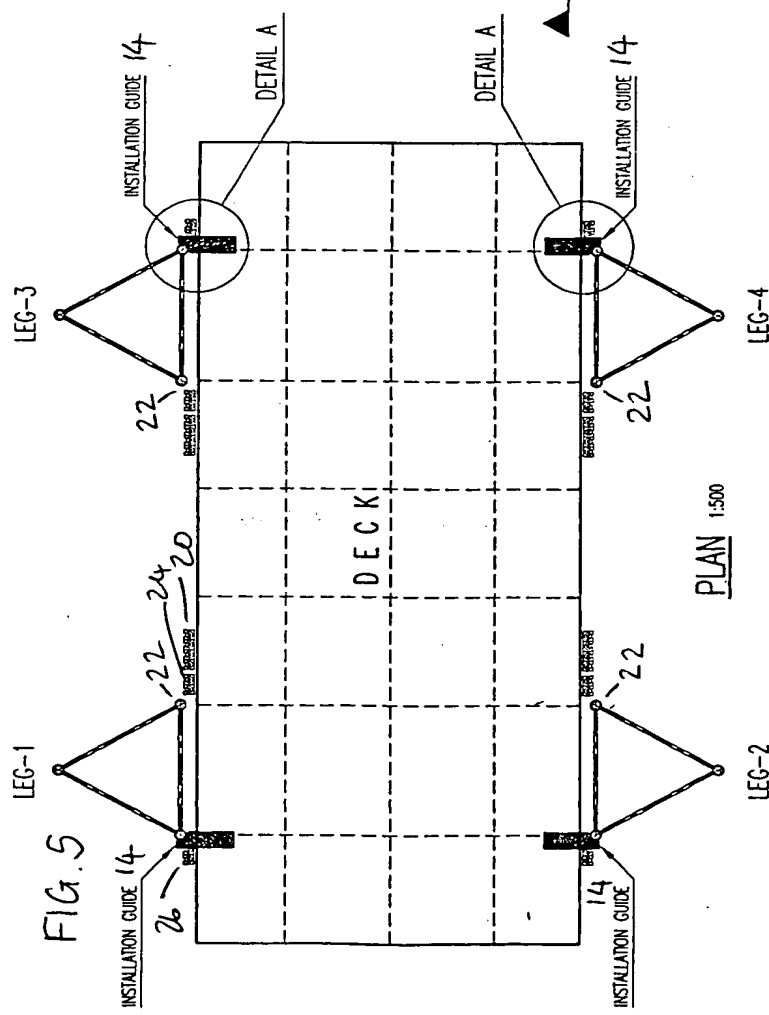

**THIS PAGE BLANK (USPTO)**

FIG. 8

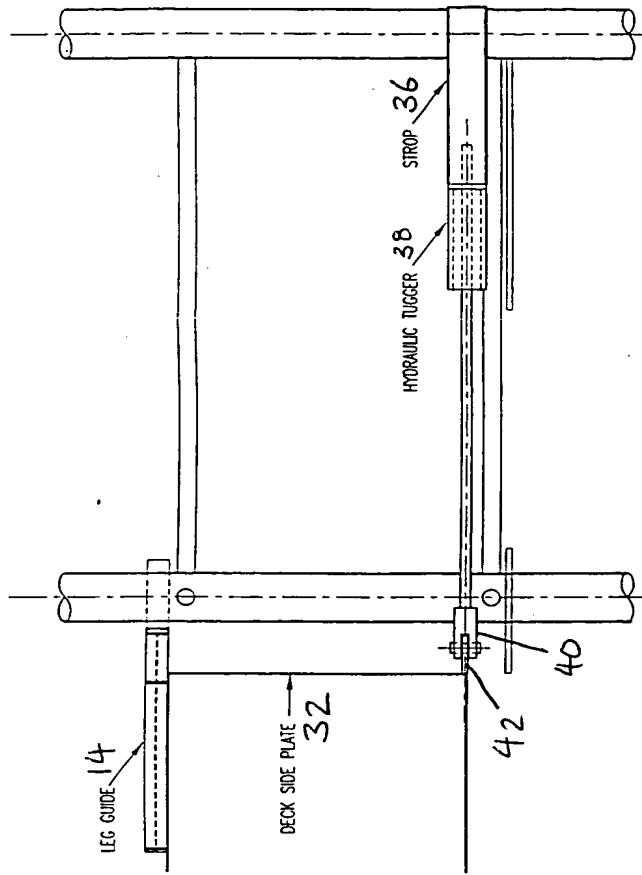


SECTION A-A (1:100)

NOTE

- 1.) TUGGER ANCHOR BLOCK ATTACHED TO DECK PAD EYE.
- 2.) SCREW JACKS (RETRACTED) POSITIONED BETWEEN DECK AND LEG.
- 3.) TUGGER TENSIONED TO PULL LEG CHORD AGAINST GUIDE.
- 4.) SCREW JACKS ACTIVATED TO SEAT BETWEEN DECK BRACKET AND LEG CHORD.
- 5.) TUGGER TENSIONED FURTHER TO HOLD CONNECTION IN POSITION.
- 6.) PERMANENT CONNECTION WELDED OUT.

FIG. 7

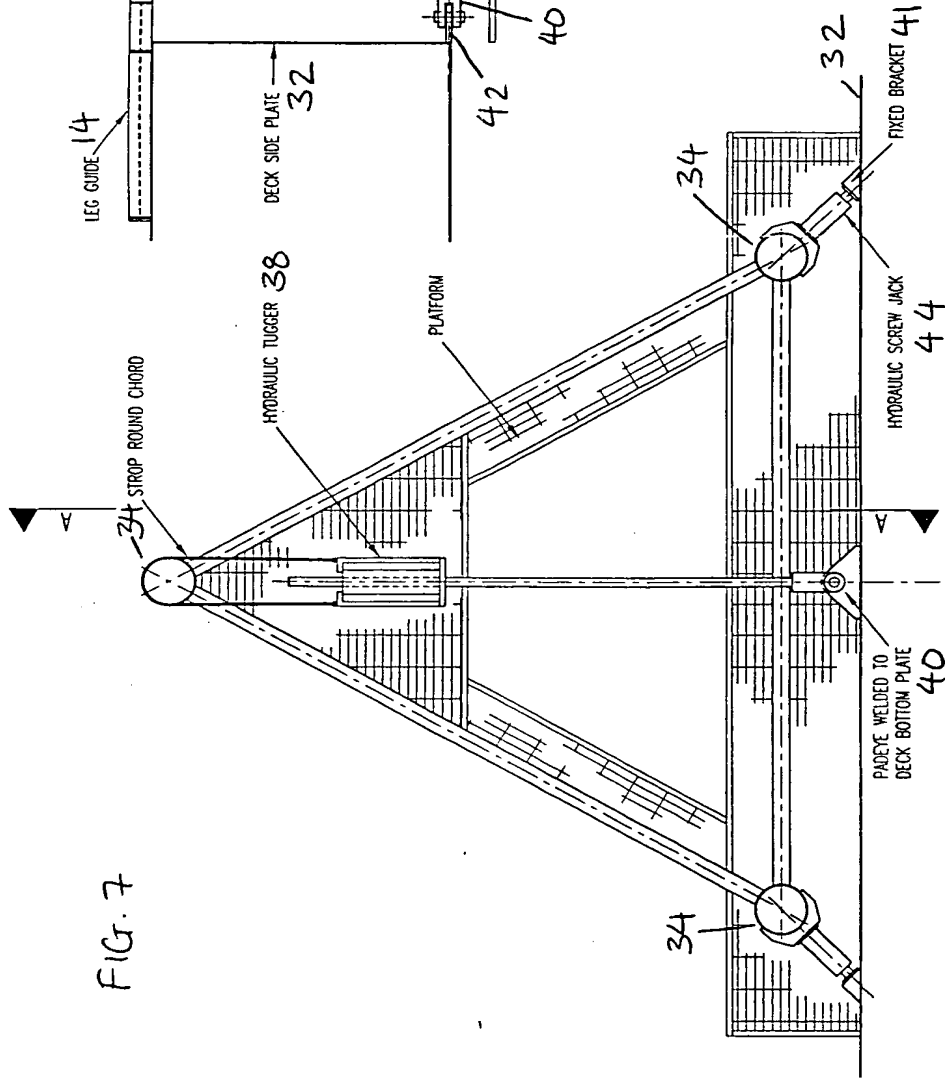


PLAN AT DECK BOTTOM PLATE LEVEL (1:100)

**THIS PAGE BLANK (CONT)**



FIG. 9

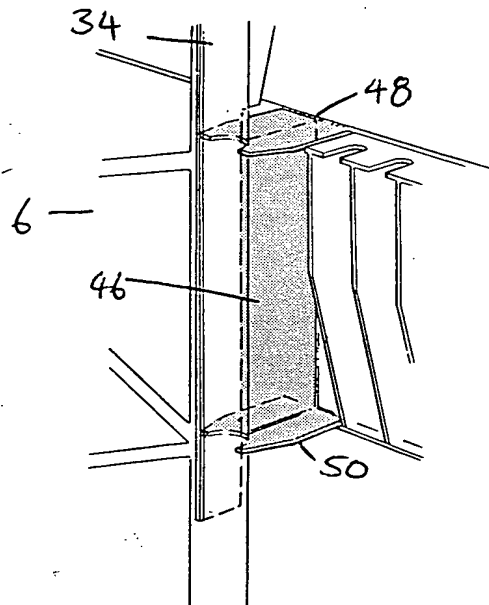

Deck to leg permanent connection

**THIS PAGE BLANK**

FIG. 10



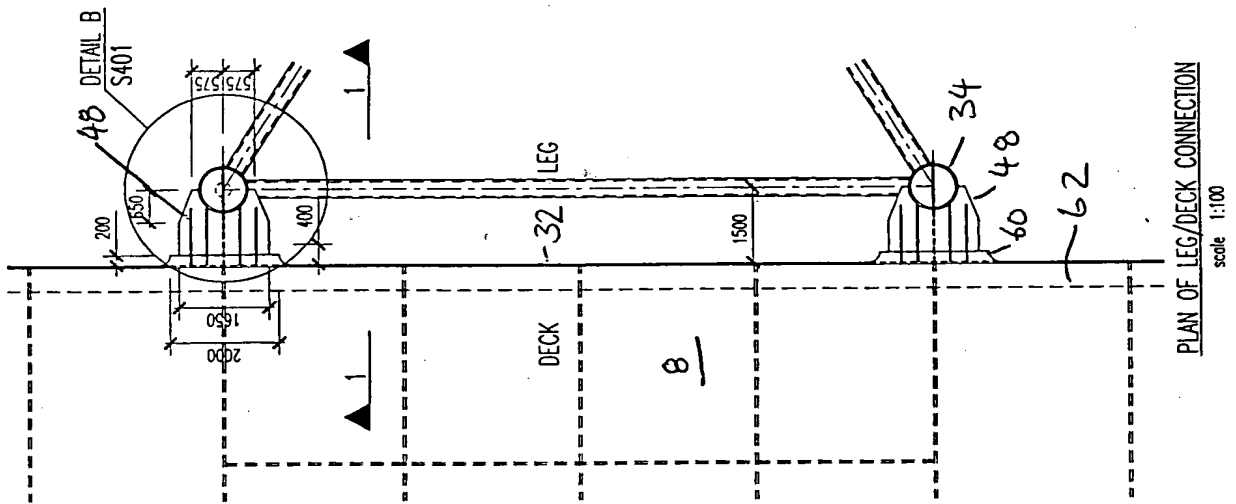


FIG. 11

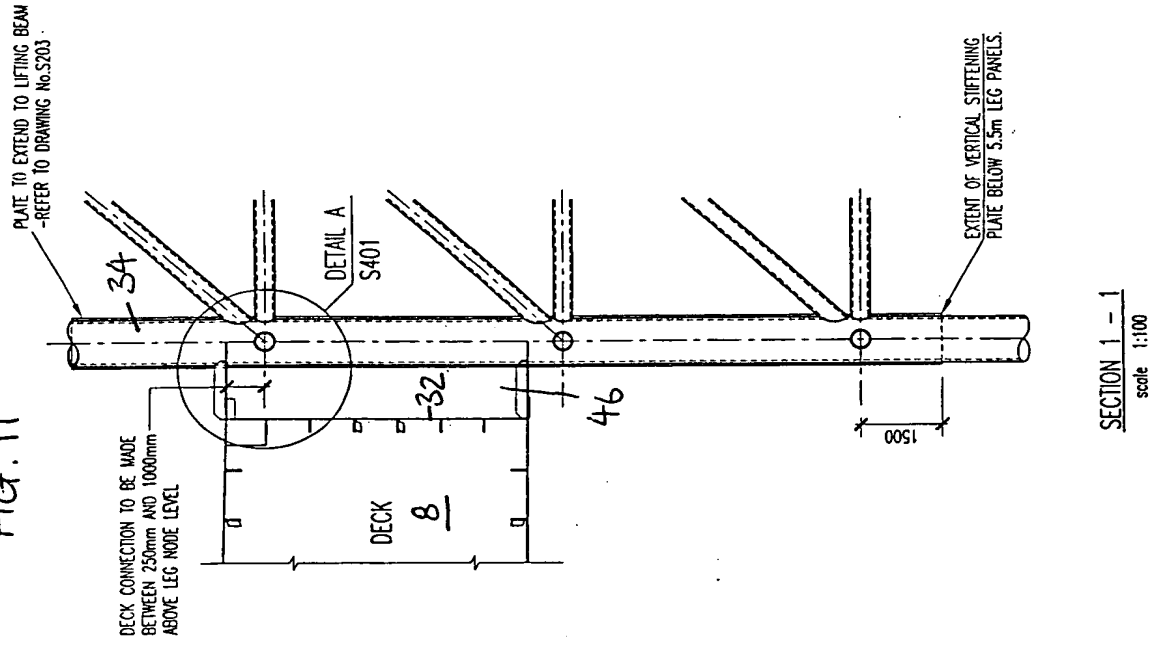


**THIS PAGE BLANK (USPIC)**

FIG. 12

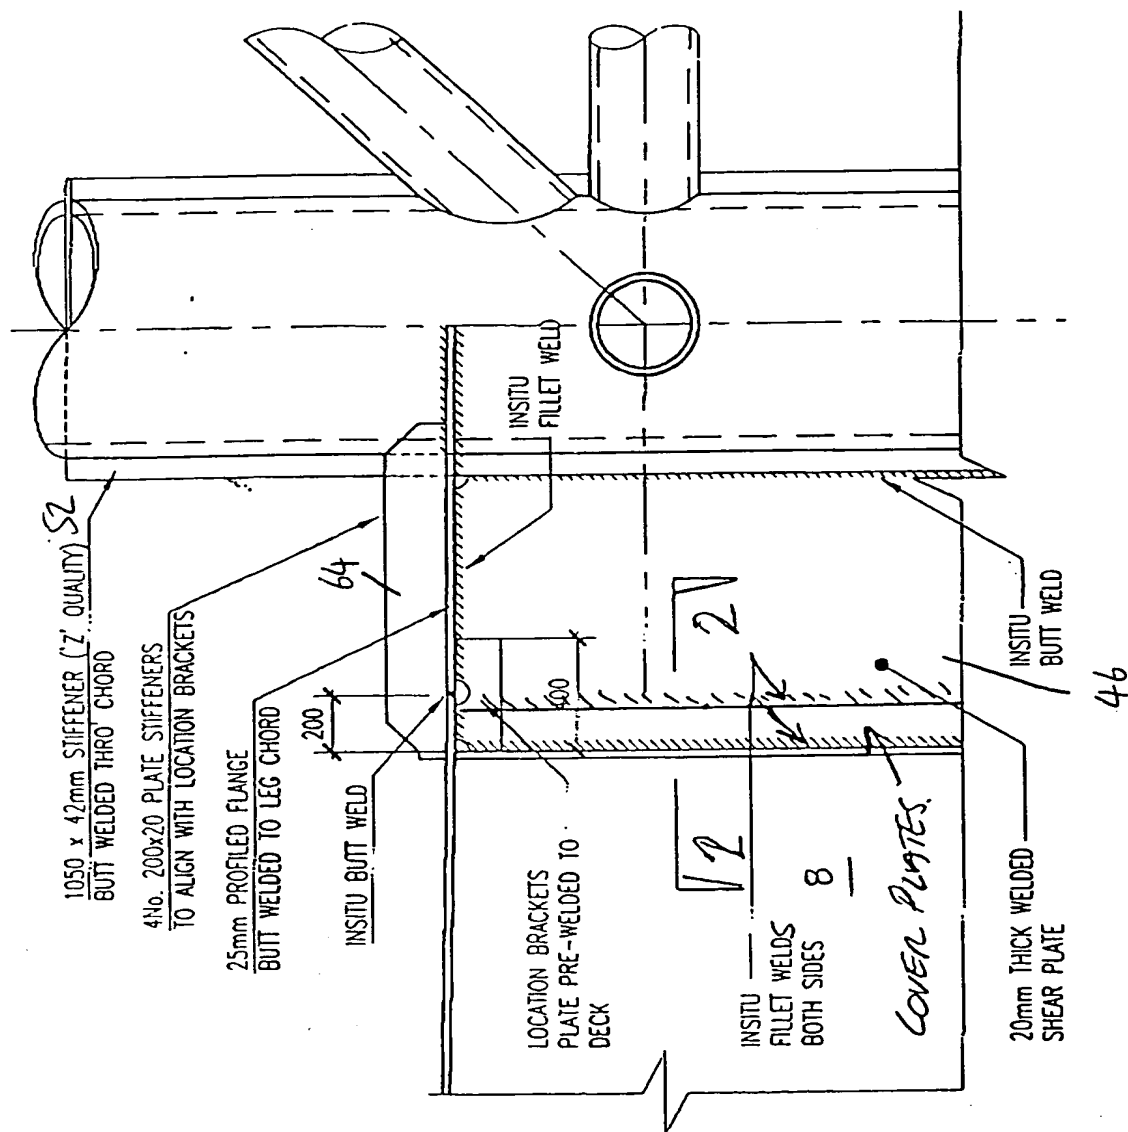

**THIS PAGE BLANK (USPTO)**

FIG. 13

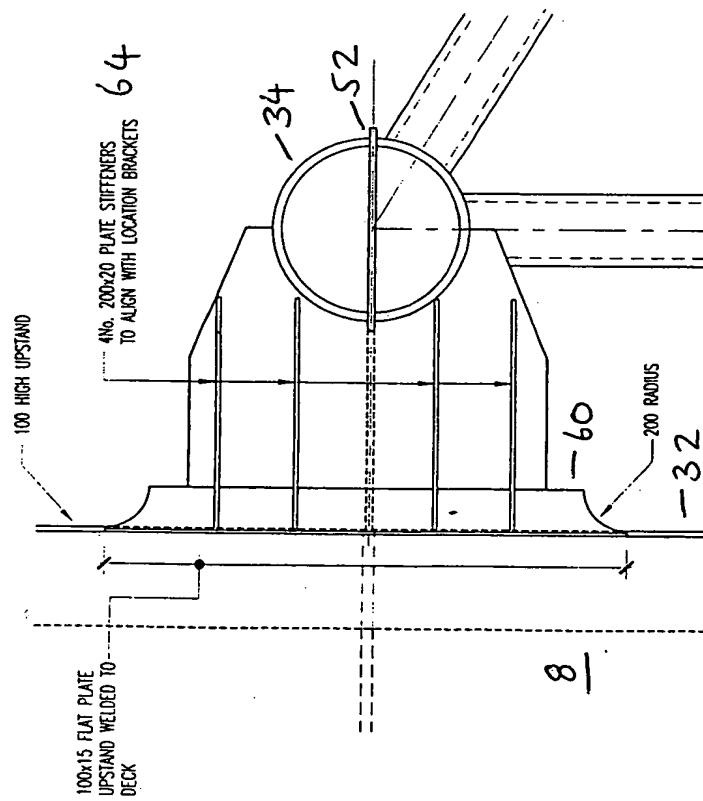


DETAIL B  $\frac{1}{25}$

$\frac{B}{5400}$

**THIS PAGE BLANK (USPIC)**



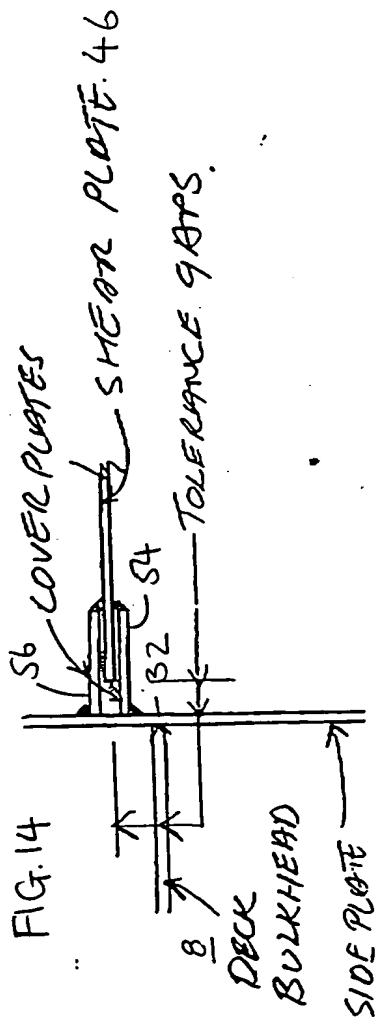

PCT/GB99/03521

25/10/99

FRANK B DENN+CO

**THIS PAGE BLANK (USPTO)**